


# GX53 series

## Ultra-Slim Disk-Shaped Lamp

Specifically designed as a practical alternative to halogen and pygmy lamps. Can be applied as a surface-mounted or as a recessed luminaire. It's an ideal solution for space demanding applications with low running temperatures.

### Applications

Display cabinets, under-shelf lighting, closets, workstations, corridors and staircases.

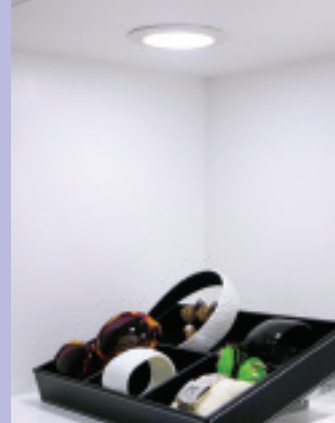

CFL GX53



Key: **(WW)** warm white 3000K  
**(CW)** cool white 4000K



**GX0109i**

	Order Code	Lamp Base	Diameter (mm)	Length (mm)	Weight (g)
WW	710126 (2700k)	GX53	75	24	59
	711267 (3000k)	GX53	75	24	59
CW	710140 (4000k)	GX53	75	24	59

9 Watt
15,000 hours
Standard Pack 60 (10)
Colour Temp WARM or COOL WHITE



**GX0113i**

	Order Code	Lamp Base	Diameter (mm)	Length (mm)	Weight (g)
WW	710232 (3000k)	GX53	75	33	89
CW	710249 (4000k)	GX53	75	33	89

13 Watt
15,000 hours
Standard Pack 60 (10)
Colour Temp WARM or COOL WHITE

## PRODUCT INFORMATION

**Encased with Silicone Diffuser**  
Reduces glass breakage and is completely recyclable.

**Circular Glass Cover**  
Provides exceptional lumen output.




**Translucent Finish on Lamp Base**  
Excellent all-round light distribution.

**Hidden Integrated Electronic Ballast**  
High frequency electronic ballast securely located behind the T2 tube.


**T2 U-shaped Tube with 2 'Joint-kiss'**  
Gives a uniform light distribution.

**Reduced Glass-tube Breakages**  
Specially produced T2 tube decreases glass-tube breakages.

**Reversed "L" Slot / Keyway**  
The reversed "L" slot / keyway on the base of the lamp is designed to IEC standards, which ensures safe engagement of the lamp holder in contact position.

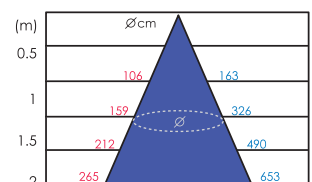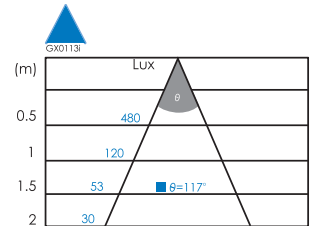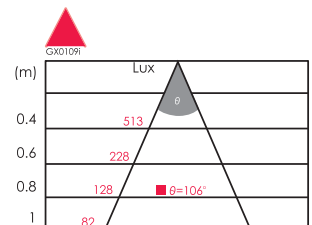

### Luminous Intensity in cd

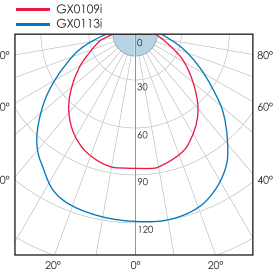

- 15,000 hrs lifetime
- 600,000 switching cycles
- shorter preheating time

**GX53 Lamp Holder Additional Retractable Covers for Extra Safety**

Retractable covers

Safety Ridge / Key for engagement

